



INVL Series-Long Life


INVL12-33 (12V 33Ah)

INVERMEXA


Performance Characteristics

Nominal Voltage	12V
Number of cell	6
Design Life	10 years
Nominal Capacity 25°C	
• 20 hour rate (1.75A, 10.8V)	35.0Ah
• 10 hour rate (3.30A, 10.8V)	33.0Ah
• 5 hour rate (5.58A, 10.5V)	27.9Ah
• 1 hour rate (22.3A, 9.6V)	22.3Ah
Internal Resistance	
• Fully Charged Battery 25°C	<12mOhms
Self-Discharge	
• 3% of capacity declined per month at 20°C	
Operating Temperature Range	
• Discharge	-20~60°C
• Charge	-10~60°C
• Storage	-20~60°C
Max. Discharge Current 25°C	330A (5s)
Short Circuit Current	850A
Charge Methods: Constant Voltage Charge 25°C	
• Cycle use	2.40-2.45VPC
• Maximum Charging Current	9.9A
• Temperature compensation	-30mV/°C
• Standby use	2.20-2.28VPC
• Temperature compensation	-20mV/°C
Dimensions and Weight	
• Length (mm/inch)	195 / 7.68
• Width (mm/inch)	130 / 5.12
• Height (mm/inch)	155 / 6.10
• Total Height (mm/inch)	168 / 6.61
• Approx. Weight (Kg/lbs)*	9.7 / 21.4

*Weight deviation: ~5%

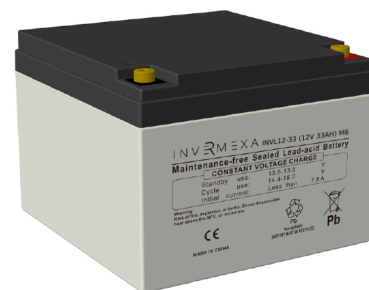

Layout

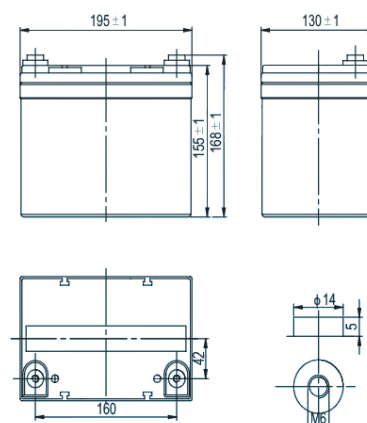

Discharge Constant Current (Amperes at 77°F 25°C)

End Point Volts/Cell	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	69.3	57.4	32.6	22.3	9.08	6.30	3.36	1.81
1.65V	65.0	54.1	31.3	21.9	8.97	6.25	3.35	1.79
1.70V	60.0	51.4	30.4	21.2	8.45	6.15	3.32	1.78
1.75V	56.1	47.8	29.8	20.3	8.25	5.58	3.31	1.76
1.80V	51.4	44.8	28.8	19.8	8.18	5.50	3.30	1.75

Discharge Constant Power (Watts at 77°F 25°C)

End Point Volts/Cell	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	122	100	65.3	45.5	40.9	23.3	17.4	12.2
1.65V	116	98.6	61.7	44.2	40.5	23.1	17.3	11.9
1.70V	110	95.7	60.0	43.5	39.9	22.6	16.8	11.5
1.75V	104	92.0	58.0	42.5	39.1	21.8	16.0	11.3
1.80V	97.7	89.0	56.0	41.5	38.3	21.0	15.2	11.0



INVL Series-Long Life

INVL12-33 (12V 33Ah)

INVERMEXA

General features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

Standards

- Compliance with IEC 60896 standards, EU Battery Directive.
- UL, CE Certified.
- MAnufactured under ISO45001, ISO9001 and ISO14001 certified production facilities.

Applications

- All purpose.
- Uninterruptable Power Supply (UPS).
- Electric Power System (EPS).
- Emergency backup power supply.
- Alarm and security system.
- Communication power supply.
- DC power supply.
- Auto control system.

